

# 2-Face MonoPower Basic

## Single glass with frame

ASP M6-60 BF Series 370W-385W

Bifacial monocrystalline PV-module



### QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



### GERMAN ENGINEERING

Best design by the art of German engineering



### SAVE INVESTMENT

Product warranty of 12 years and performance warranty of 25 years



### POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output




### FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



### STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa and wind loads up to 2400 Pa

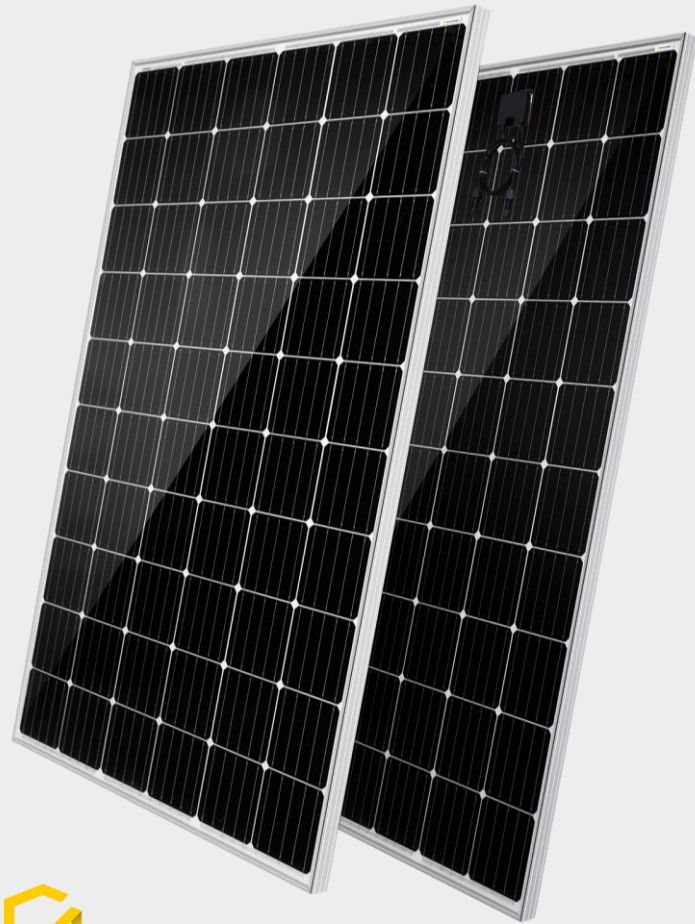

**12 YEARS**

PRODUCT WARRANTY



Exemplary illustration of ASP M6-60 BF

## OUR PERFORMANCE GUARANTEE



**25 YEARS**

PERFORMANCE GUARANTEE

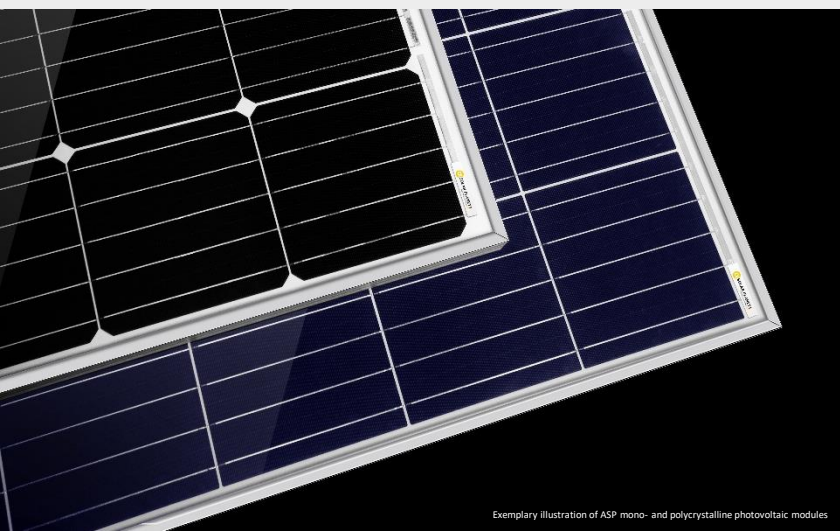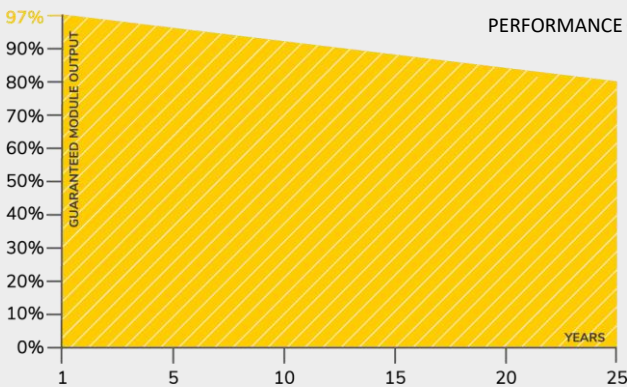

Exemplary illustration of ASP mono- and polycrystalline photovoltaic modules

## CERTIFICATES

SGS  
**TÜV**  
SAAR

IEC 61215  
IEC 61730  
PERIODICAL  
INCEPTION

**SGS**

PID RESISTANT  
SALT MIST RESISTANT  
SAND RESISTANT  
CORROSIVE GAS (NH<sub>3</sub>)

**CE**

**CEC**



**SOLAR PLANET**

Enjoy the quality difference

## 2-Face MonoPower Basic Module

Single glass with frame

ASP M6-72 BF Series 370W-385W

### TECHNICAL DATA

		ASP370M6-72	ASP375M6-72	ASP380M6-72	ASP385M6-72
Maximum power	P <sub>max</sub> (Wp)	370	375	380	385
Maximum power voltage	V <sub>mp</sub> (V)	40.52	40.80	41.08	41.35
Maximum power current	I <sub>mp</sub> (A)	9.13	9.19	9.25	9.31
Open-circuit voltage	V <sub>oc</sub> (V)	47.77	48.07	48.37	48.67
Short-circuit current	I <sub>sc</sub> (A)	9.93	10.00	10.07	10.14
Module efficiency	%	18.79	19.04	19.29	19.55
Power tolerance	P <sub>max</sub> (W)		0/+5		
Maximum system voltage DC	V		1500		
Operating temperature	°C		-40 to +85		
Temperature coefficients of P <sub>max</sub>	%/°C		-0.44		
Temperature coefficients of V <sub>oc</sub>	%/°C		-0.33		
Temperature coefficients of I <sub>sc</sub>	%/°C		0.05		
Nominal operating cell temp. (NOCT)	°C		45±2		

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C.


### MATERIAL CHARACTERISTICS

Cell type	Bifacial monocrystalline 156.75 x 156.75 mm
No. of cells	72 (6 x 12)
Dimensions	1956 x 992 x 40 mm
Weight	28.3 kg
Junction box	IP68 rated
Output cable	4.0 mm <sup>2</sup> , 300 mm length
Connector type	QC4. 10-35
Hail resistance	Max. Ø 25 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m <sup>2</sup>
Mechanical load	5400 Pa / 550 kg / m <sup>2</sup>

### PACKING INFORMATION

Packing configuration	66 pcs / double pallet
Loading capacity	726 pcs / 40 HQ
Size / pallet	2035 x 1140 x 2264 mm
Weight	1980 kg / pallet

### DRAWINGS

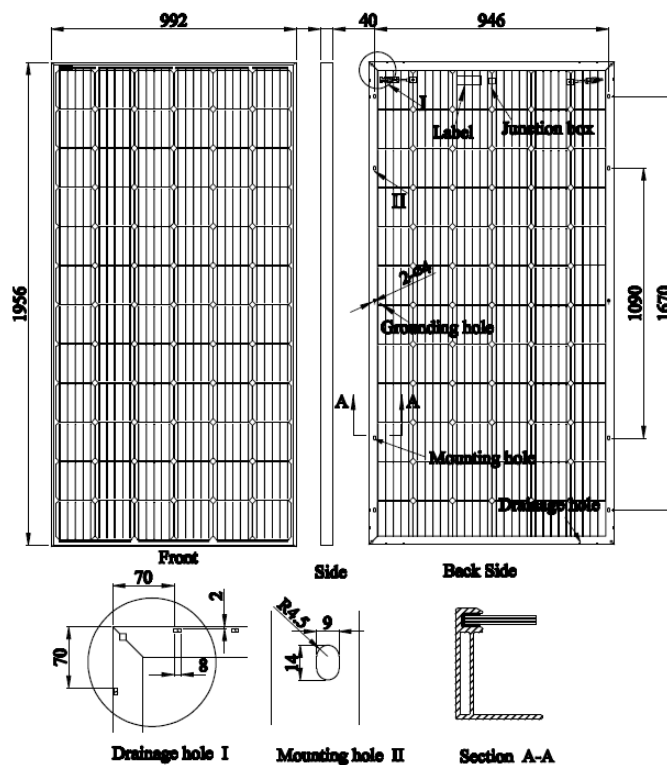

Alpha Solar Planet GmbH  
Schwalbenweg 1 g, 86343 Königsbrunn  
GERMANY

Tel.: +49 8231 99190 70  
Fax: +49 8231 99190 89

E-mail: sales@a-s-p.solar  
Web: www.a-s-p.solar

