

# MonoPower Large Cells

ASP HM6-60 Series 320W-335W

Monocrystalline PV-module



## QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



## GERMAN ENGINEERING

Best design by the art of German engineering



## SAVE INVESTMENT

Product warranty of 12 years  
and performance warranty of 25 years



## POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output




## FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



## STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa  
and wind loads up to 2400 Pa

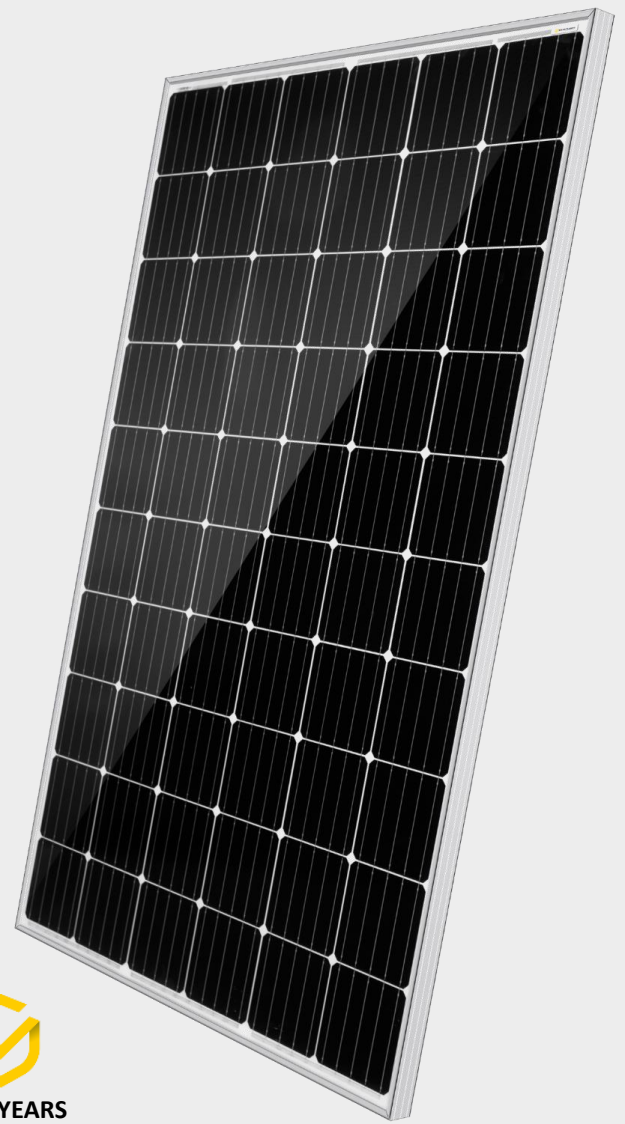


**12 YEARS**  
PRODUCT WARRANTY

## OUR PERFORMANCE GUARANTEE



**25 YEARS**  
PERFORMANCE GUARANTEE

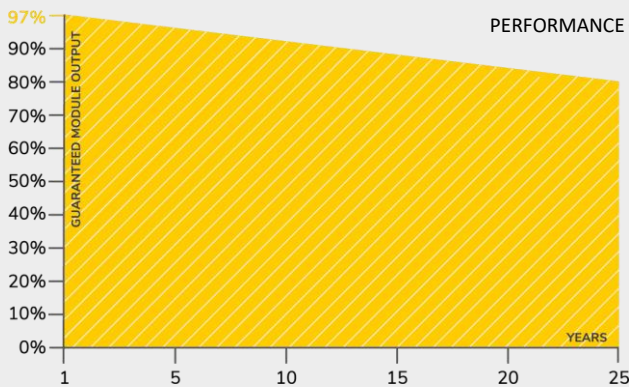

## CERTIFICATES


SGS  
**TÜV**  
SAAR

IEC 61215  
IEC 61730  
PERIODICAL  
INCEPTION

**SGS**

PID RESISTANT  
SALT MIST RESISTANT  
SAND RESISTANT  
CORROSIVE GAS (NH<sub>3</sub>)

**CE CEC**

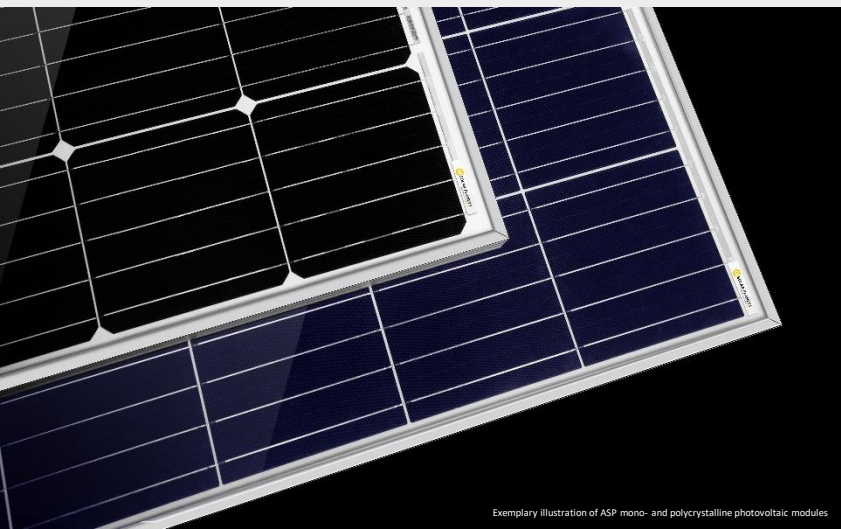

**α SOLAR PLANET**  
Enjoy the quality difference

# MonoPower Large Cells

ASP HM6-60 Series 320W-335W

## TECHNICAL DATA

		ASP320HM6-72	ASP325HM6-72	ASP330HM6-72	ASP335HM6-72
Maximum power	P <sub>max</sub> (W <sub>p</sub> )	320	325	330	335
Maximum power voltage	V <sub>mp</sub> (V)	33.40	33.61	33.81	34.02
Maximum power current	I <sub>mp</sub> (A)	9.59	9.68	9.76	9.85
Open-circuit voltage	V <sub>oc</sub> (V)	40.90	41.10	41.31	41.49
Short-circuit current	I <sub>sc</sub> (A)	10.15	10.20	10.37	10.49
Module efficiency	%	19.18	19.48	19.78	20.08
Power tolerance	P <sub>max</sub> (W)		0 / +5		
Maximum system voltage DC	V		1000		
Operating temperature	°C		-40 to +85		
Temperature coefficients of P <sub>max</sub>	%/°C		-0.37		
Temperature coefficients of V <sub>oc</sub>	%/°C		-0.28		
Temperature coefficients of I <sub>sc</sub>	%/°C		0.048		
Nominal operating cell temp. (NOCT)	°C		45 ± 2		

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C.


## MATERIAL CHARACTERISTICS

Cell type	Monocrystalline 158.75 x 158.75 mm
No. of cells	60 (6 x 10)
Dimensions	1665 x 1002 x 35 mm
Weight	19.0 kg
Junction box	IP67 rated
Output cable	4.0 mm <sup>2</sup> , 900 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m <sup>2</sup>
Mechanical load	5400 Pa / 550 kg / m <sup>2</sup>

## PACKING INFORMATION

Packing configuration	64 pcs / double pallet
Loading capacity	896 pcs / 40 HQ
Size / pallet	1695 x 1135 x 2410 mm
Weight	1315 kg / double pallet

## DRAWINGS

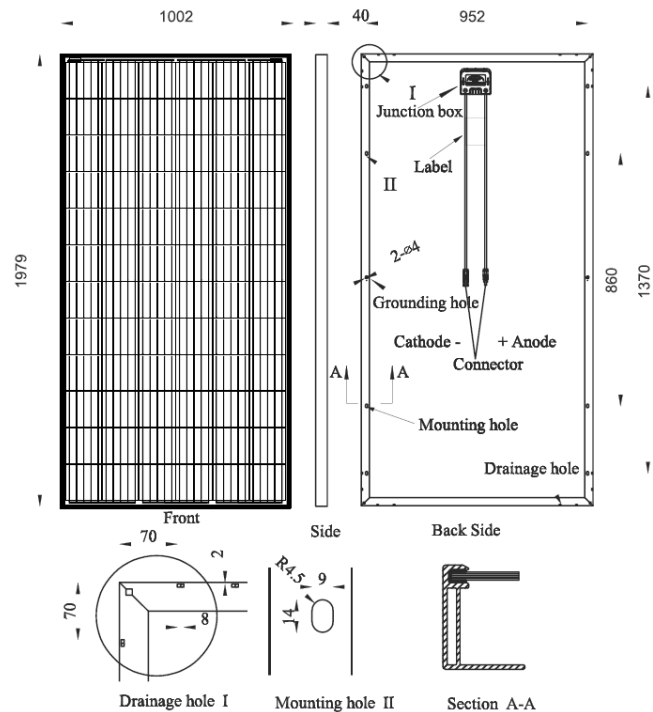

Alpha Solar Planet GmbH  
Schwalbenweg 1 g, 86343 Königsbrunn  
GERMANY

Tel.: +49 8231 99190 70  
Fax: +49 8231 99190 89

E-mail: sales@a-s-p.solar  
Web: www.a-s-p.solar

